ART

Color Swatches:

SL ART

Sl Art is a series of exclusive artistic security doors that draws its inspiration from ancient art. The series includes designer security doors that combine elements created by a blacksmith-artist and painted in a special technique that gives the doors an authentic antique look.

Technical Specifications:

- Model 125 multi-bolted lock, 14 mm. bolts with a 25 mm. penetration depth into frame - a SUPERLOCK exclusive.
- Cylinder shield with self-destructing mechanism - a SUPERLOCK exclusive.
- Maximum resistance, suited to climatic conditions.
- Fortified thermal - acoustic insulation.
- Improved rimlock - a SUPERLOCK exclusive.

SL 5010 | Art castle silver

The pictures are for illustration only. There may be differences between the look and colors of the doors in the picture, and in reality.

All Sl-Art 5017, 5019, 2021 with decorative elements on the external side Only the decorative handles in models 5017 ,5019 ,5021 are option only. not include in the doors price

SL 5011 | Art castle gold

SL 5017 | Art 7126 grey granulated

SL 5019 | Art grey granulated silver

SL 5021 | Art black granulated

All SI-Art 5017, 5019, 5021 with decorative elements on the external side only. The decorative handles in models 5017 ,5019 ,5021 are option only, not include in the doors price

SUPERLOCK COLOR SWATCHES

RAL TEXTURE COLORS

9016 white

1013 ivory

GRAIN

9016 white

9001 white pearl

0096 Aluminuim

7240 grey

441p beige

900 grey

7126 grey

600 grey (blue)

8019 Dark brown

8016 brown

1116 bordeaux

6109 green

235 blue

9005 black

SUPERLOCK COLOR SWATCHES - continued

ART DECOR BIZANT

gold with brown background


bronze with black background


silver with black background

ART DECOR FOLKLORE


gold with brown background

bronze with black background


silver with black background

ART DECOR WOOD LIKE

gold with brown background

bronze with black background


silver with black background

brown with wenga background

ART DECOR CASTLE

gold with black background

bronze with black background

silver with black background

HARDWARE COLLECTION

Luxury Covered Rosette

Antique

Nickel

Luxury Covered Plate

Antique

Nickel

Luxury Painted Plate

Brown

White

Blacksmith hardware

Inbal

covered rosette - nickel

Yuval

covered nickel

Antiqe

Ofek

190

100

Coral

180

181

183

185

191



192

193

152

Copper

Black

Brass

101

Brass Black

108

Brass Black Copper

131

Black Copper

132

124

158

200

SL TECHNIC

SELF DESTRUCTION MECHANISM

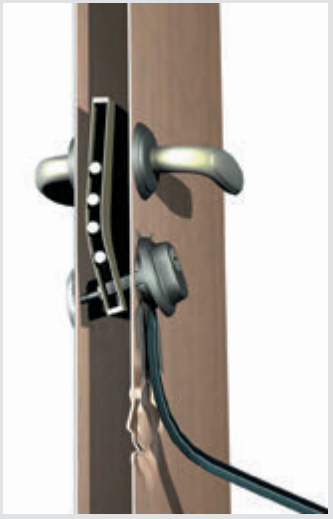

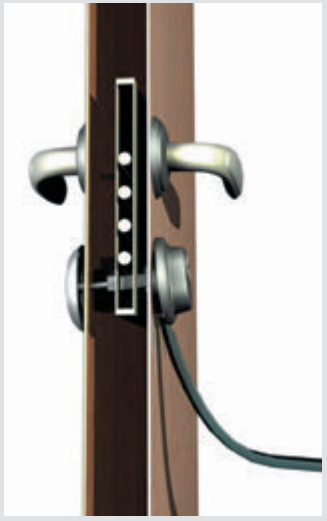

SUPERLOCK has developed a unique self-destructing mechanism that makes it difficult to break into the entrance door. Any attempt to harm the exterior cylinder shield or the cylinder itself triggers a chain reaction by which the lock is damaged. As a result, the locking system sticks, creating a situation in which it is stuck fast (like with a safe). The self-destructing mechanism is installed on all the entrance doors produced in our plant

SECURITY LOCK

Luxury Rim Lock

Extra Lock
(exterior side)

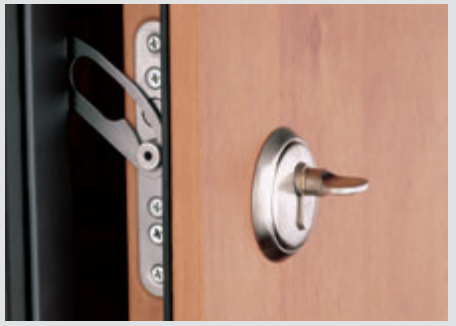

Extra Lock
(interior side)

SL TECHNIC
SCANNING DOOR

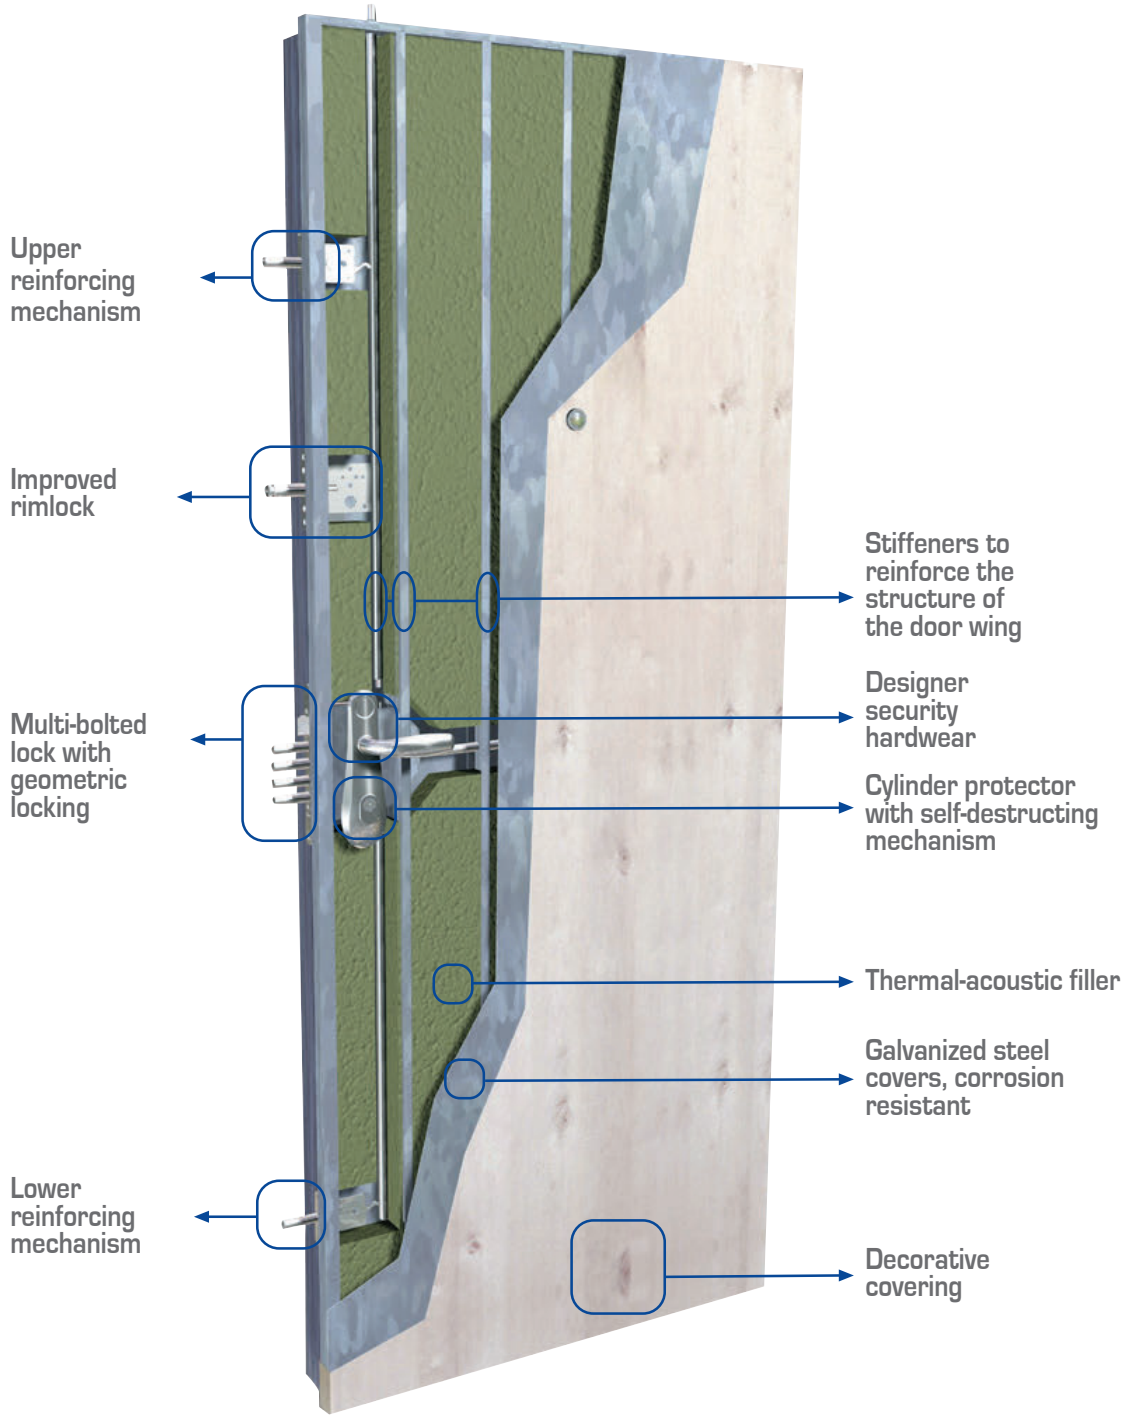

SL TECHNIC

Specification:

- Geometrical Lock (applying force on the bolt does not affect the other bolts)
- Locking/unlocking operation is achieved by one turn of key
- Bolt projection: 25mm
- Corrosion resistance: 8hr salt for test
- 4 front bolts with 14mm diameter for lock 125
- 4 front bolts with 10mm diameter for lock 124
- 3 additional bolts to other direction 14mm diameter each
- Axial load on bolt up to 500kg per EN 12209
- Lateral load on bolts up to 700kg per EN 12209

Security lock model 124

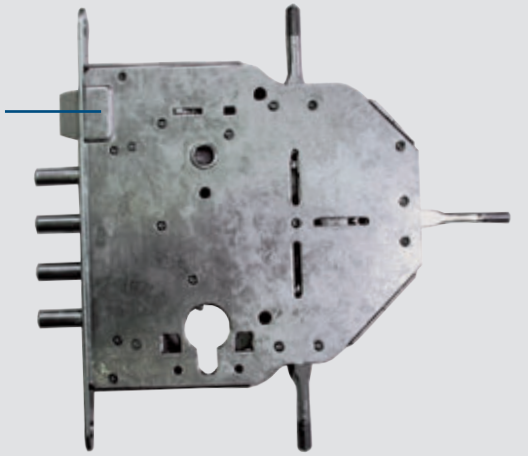

Security lock model 125 - drawing

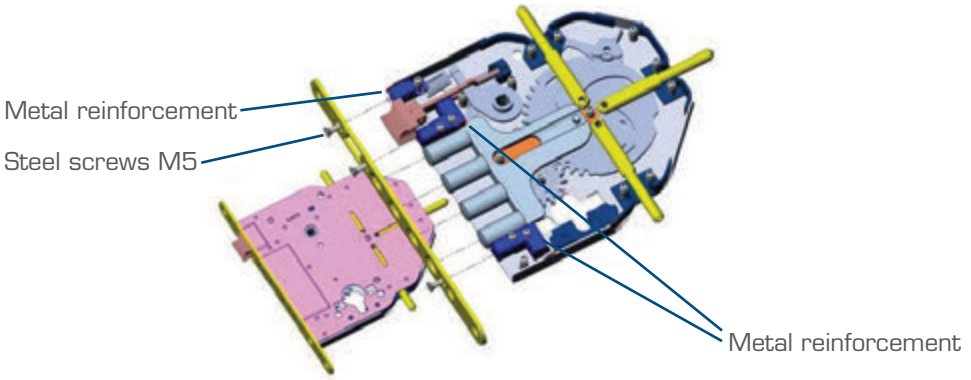

Security lock model 125

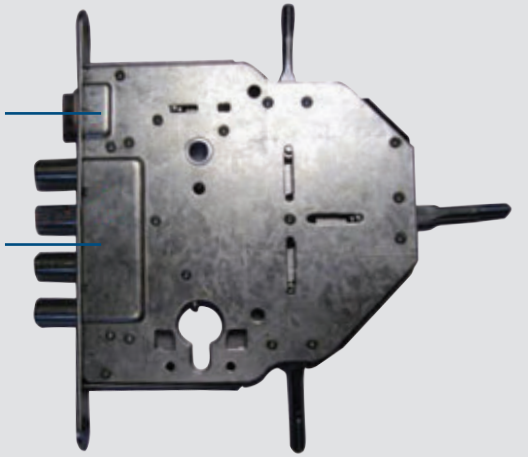

INSTYTUT MECHANIKI PRECYZYJNEJ
Zakład Certyfikacji
01-796 Warszawa, ul. Duchnicka 3
Rok zał. 1927
tel. 0-22 663-43-14,
0-22 560-25-40
tel./fax 0-22 560-29-22,
0-22 663-43-17
e-mail: wojtan@imp.edu.pl
http://www.imp.edu.pl/cert

AC 041

CERTIFICATE OF CONFORMITY

No. P41/325/2008 (3037)

ENGLISH EDITION

Name and address of the certificate owner:	**SHIRYONIT HOSEM SECURITY PRODUCTS MANUFACTURING (1991) LTD. 12 DERECH HAHAROSHET, NEW IND. ZONE, KIRYAT GAT, ISRAEL**
Name and address of the manufacturer:	**SHIRYONIT HOSEM SECURITY PRODUCTS MANUFACTURING (1991) LTD. 12 DERECH HAHAROSHET, NEW IND. ZONE, KIRYAT GAT, ISRAEL**
Product name:	**Door lock**
Type (variants):	**LOCK 125**
Main features:	**Class of protection:** **- 4 -** ***acc. to PN-EN 12209: 2005*** Detailed classification on the reverse
SWW and PKWiU symbols:	PKWiU 28.63.12-30.00
The product is in accordance with:	PN-EN 12209: 2005
According to the report issued by:	Search Laboratory for Mechanical Security Products of Institute of Precision Mechanics (Cert. of Accr. AB035)
No. and date of the report:	No. LB-1/110/2007 issued on March 1, 2007
Date of expiration:	**September 11, 2011**

Rights for using this certificate **from September 12, 2008 until September 11, 2011** refer only to products having identical parameters as sample(s) shown for inspection and meeting requirements stated in application No. 176/W/2008.

Certification of conformity acc. to the model: type evaluation, testing & evaluation of samples, supervision including inspection of supplier's quality system.

MANAGER
Certification Division

Wojciech DĄBROWSKI, Ma.E.

DIRECTOR
Institute of Precision Mechanics

prof. Aleksander NAKONIECZNY, D.Eng.

Certificate can be published only by Certificate Owner without comments, abbreviations and changes.
Warsaw, September 12, 2008.

1	2	3	4	5	6	7	8	9	10	11
Category of use	Durability and load on latch bolt	Door mass and closing force	Suitability for use on fire/smoke doors	Safety	Corrosion resistance and temperature	Security and drill resistance	Field of door application	Type of key operation and locking	Type of spindle operation	Key identification
2	A	2	1	0	0	4	B	A	2	0

KIEROWNIK
ZAKŁADU CERTYFIKACJI
mgr inż. Wojciech Dąbrowski

SL TECHNIC
FRAMES SWATCHES

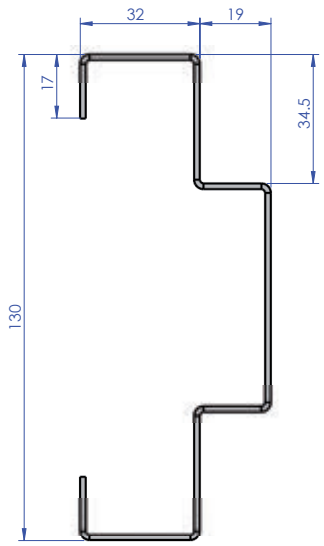

Construction Frame

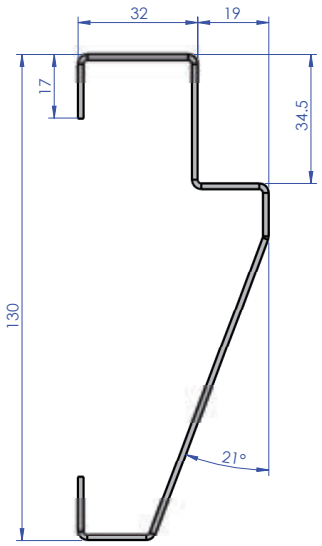

Sloping
Construction Frame

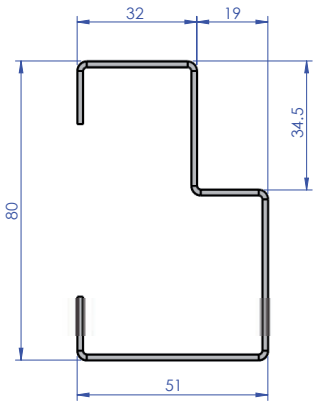

Asymmetric
Basic Frame

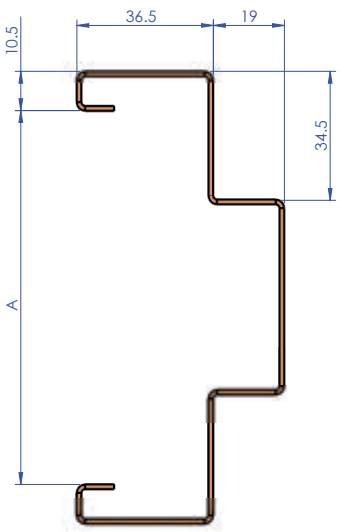

Embracing (Slip-on)
Frame

FRAMES

Basic asymmetric frame 30/50

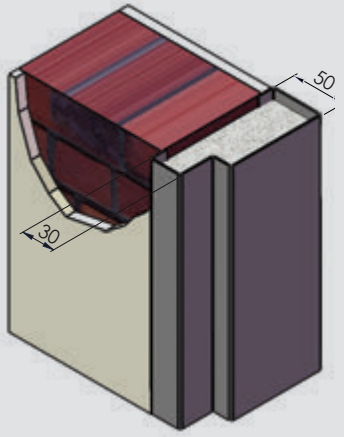

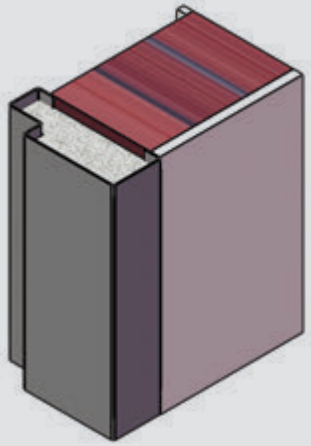

Construction frame

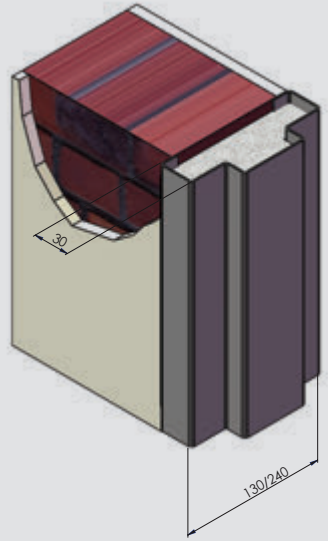

Basic asymmetric frame 50/70

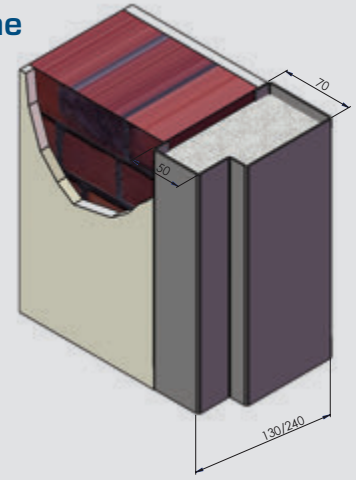

Metal cover for frame

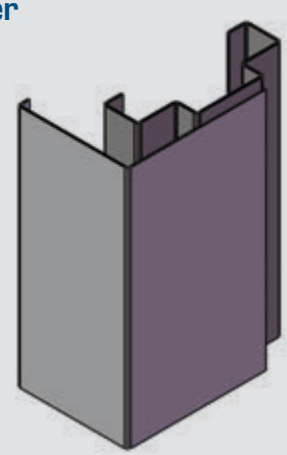

Embracing frame

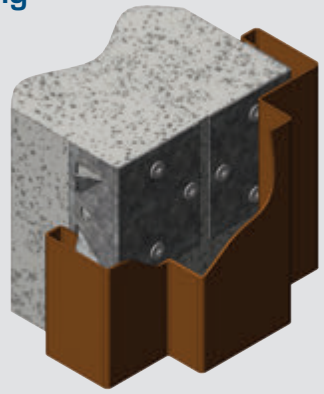

Installation of security door on embracing frame (usually gypsum wall)

WALL OPENING - CONSTRUCTION FRAME

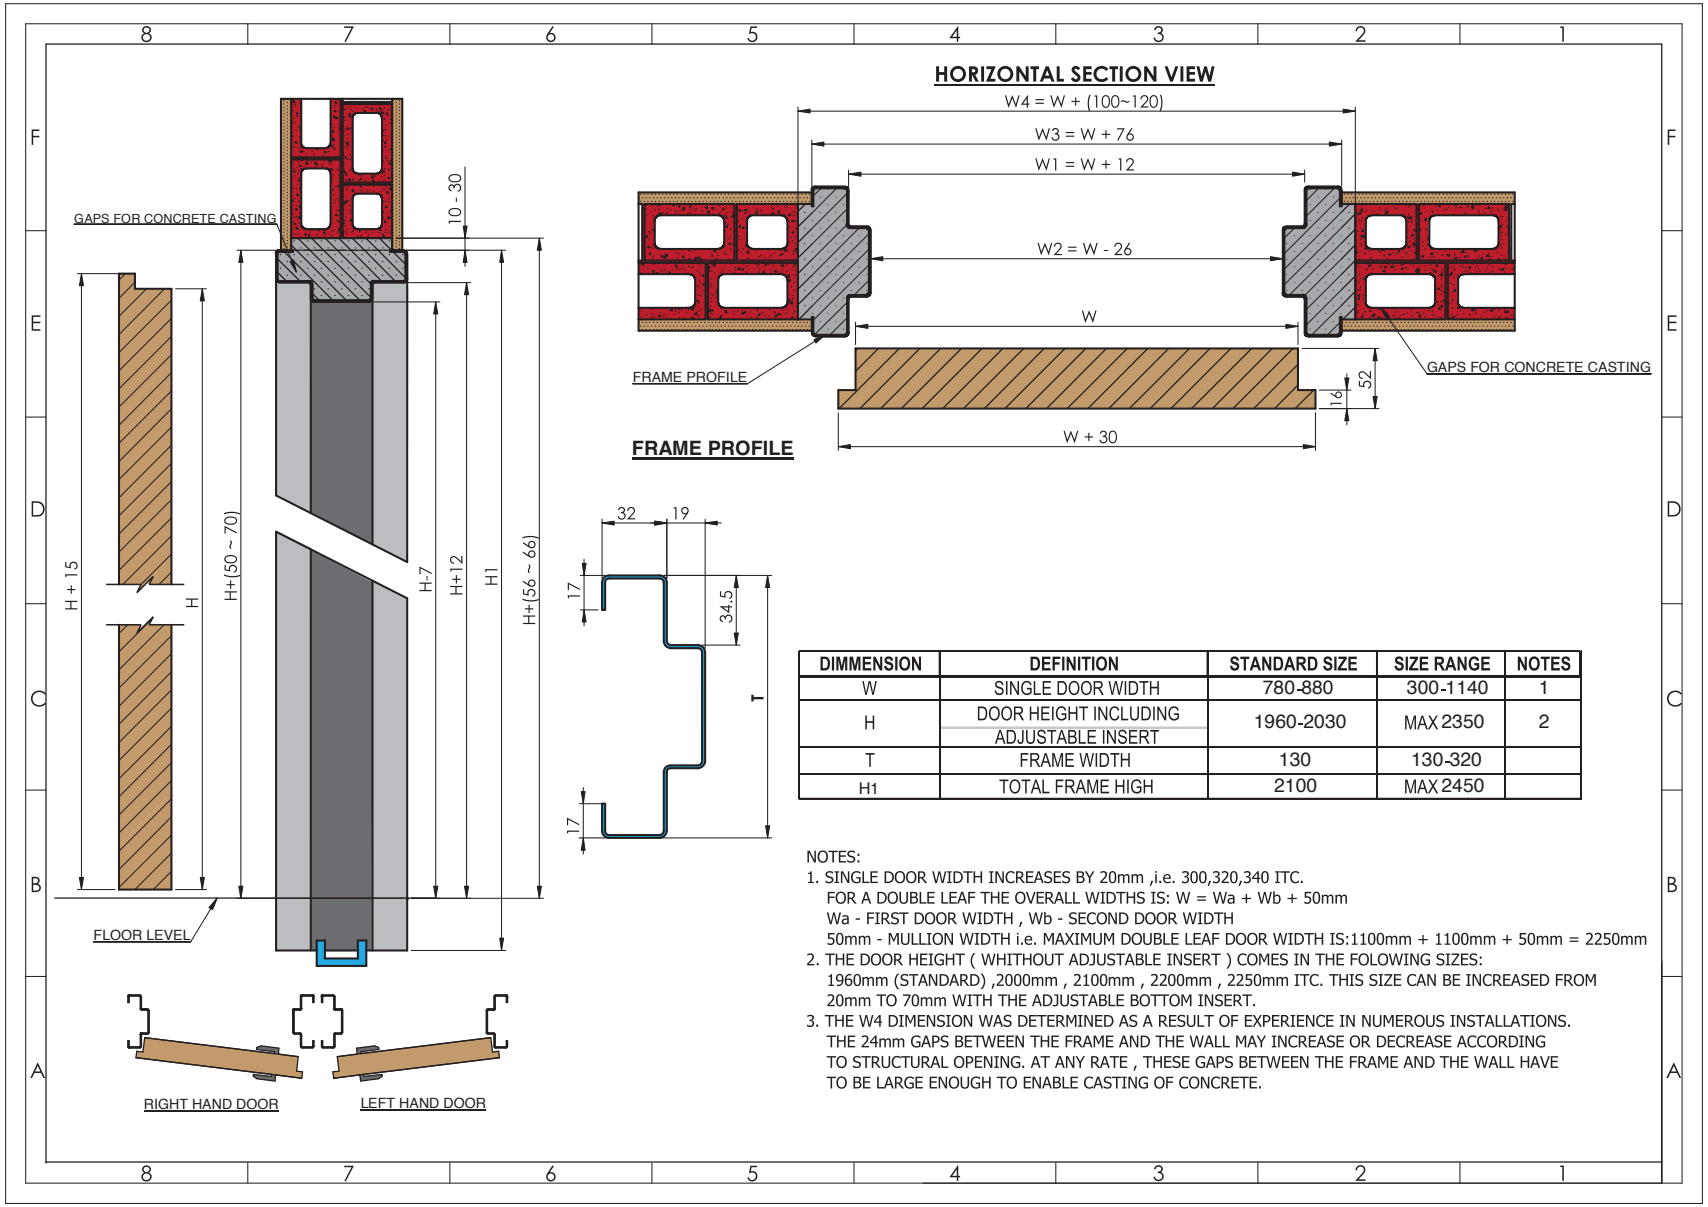

DIMMENSION	DEFINITION	STANDARD SIZE	SIZE RANGE	NOTES
W	SINGLE DOOR WIDTH	780-880	300-1140	1
H	DOOR HEIGHT INCLUDING ADJUSTABLE INSERT	1960-2030	MAX 2350	2
T	FRAME WIDTH	130	130-320	
H1	TOTAL FRAME HIGH	2100	MAX 2450	

NOTES:

1. SINGLE DOOR WIDTH INCREASES BY 20mm ,i.e. 300,320,340 ITC.
   FOR A DOUBLE LEAF THE OVERALL WIDTHS IS: W = Wa + Wb + 50mm
   Wa - FIRST DOOR WIDTH , Wb - SECOND DOOR WIDTH
   50mm - MULLION WIDTH i.e. MAXIMUM DOUBLE LEAF DOOR WIDTH IS:1100mm + 1100mm + 50mm = 2250mm
2. THE DOOR HEIGHT (WHITHOUT ADJUSTABLE INSERT) COMES IN THE FOLOWING SIZES:
   1960mm (STANDARD) ,2000mm , 2100mm , 2200mm , 2250mm ITC. THIS SIZE CAN BE INCREASED FROM 20mm TO 70mm WITH THE ADJUSTABLE BOTTOM INSERT.
3. THE W4 DIMENSION WAS DETERMINED AS A RESULT OF EXPERIENCE IN NUMEROUS INSTALLATIONS. THE 24mm GAPS BETWEEN THE FRAME AND THE WALL MAY INCREASE OR DECREASE ACCORDING TO STRUCTURAL OPENING. AT ANY RATE , THESE GAPS BETWEEN THE FRAME AND THE WALL HAVE TO BE LARGE ENOUGH TO ENABLE CASTING OF CONCRETE.

WALL OPENING - BASIC ASIMMETRIC FRAME

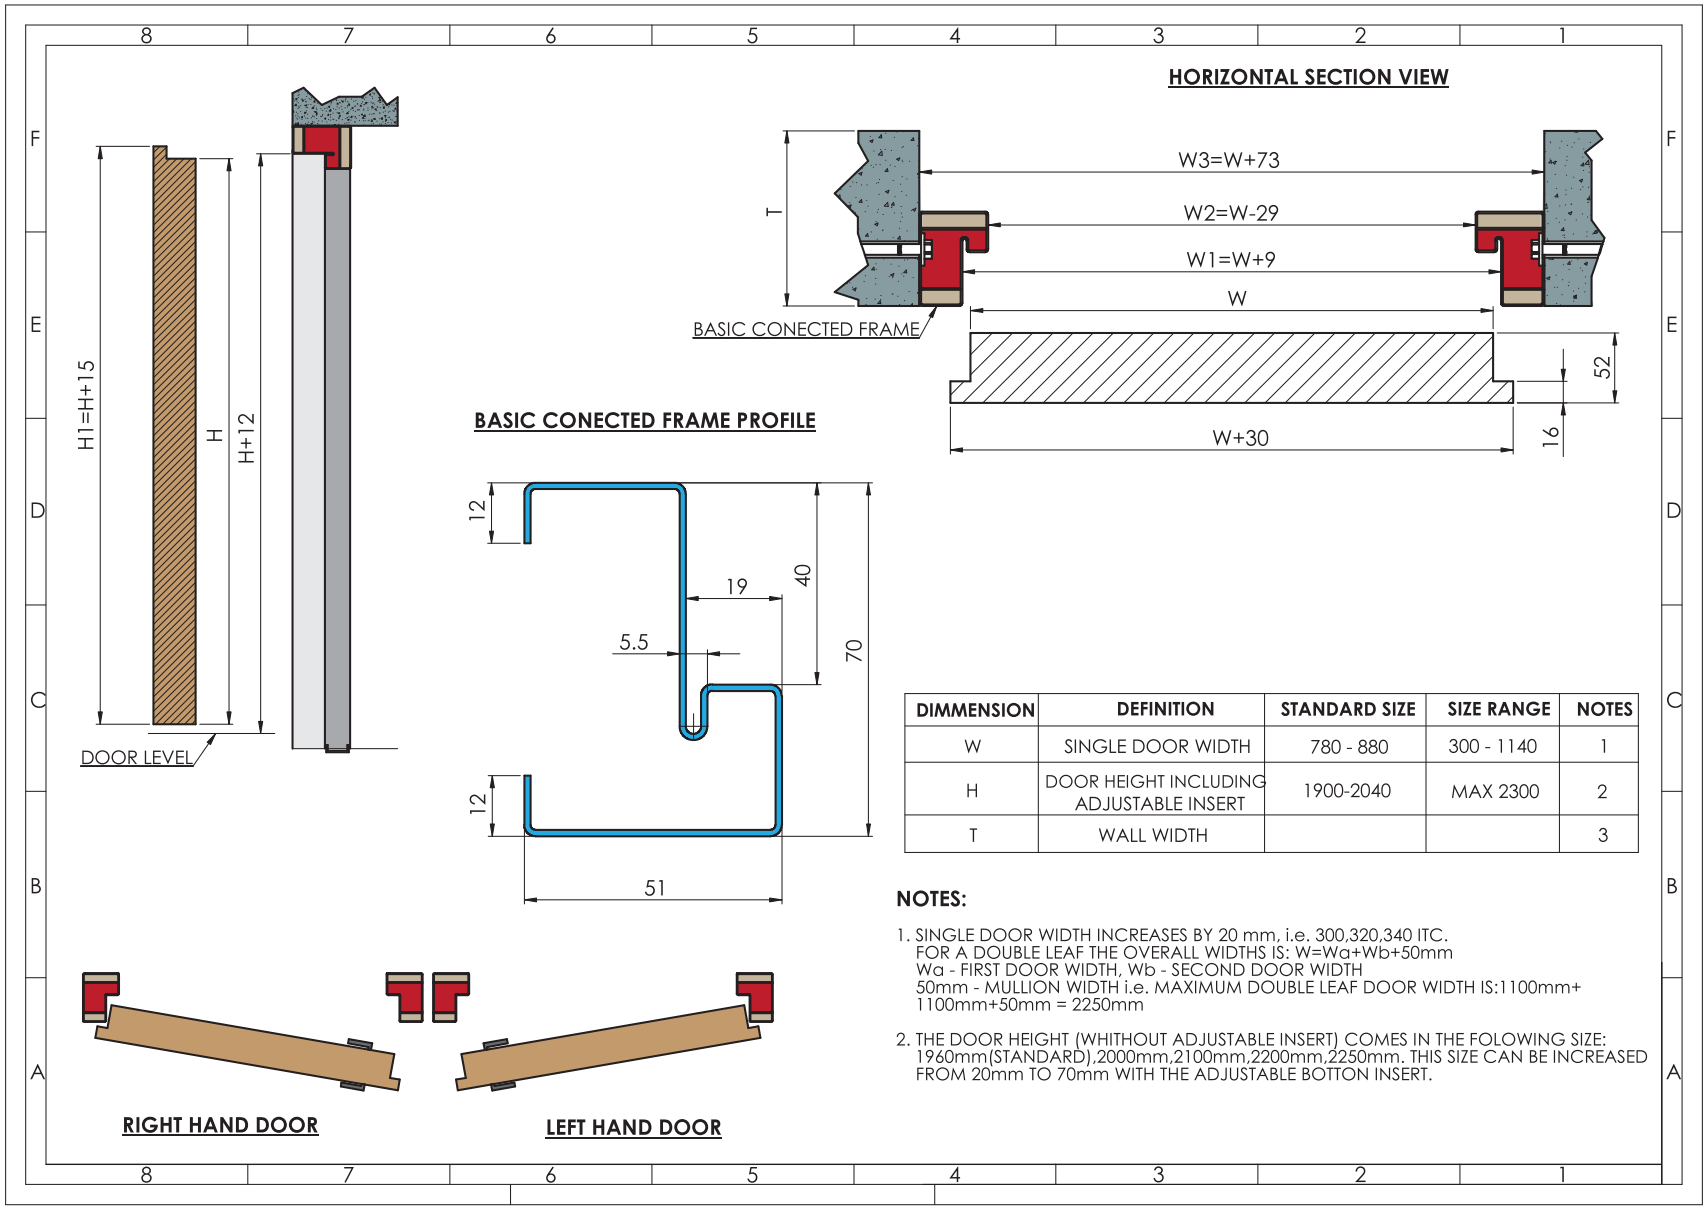

DIMMENSION	DEFINITION	STANDARD SIZE	SIZE RANGE	NOTES
W	SINGLE DOOR WIDTH	780 - 880	300 - 1140	1
H	DOOR HEIGHT INCLUDING ADJUSTABLE INSERT	1900-2040	MAX 2300	2
T	WALL WIDTH			3

NOTES:

1. SINGLE DOOR WIDTH INCREASES BY 20 mm, i.e. 300,320,340 ITC.
   FOR A DOUBLE LEAF THE OVERALL WIDTHS IS: W=Wa+Wb+50mm
   Wa - FIRST DOOR WIDTH, Wb - SECOND DOOR WIDTH
   50mm - MULLION WIDTH i.e. MAXIMUM DOUBLE LEAF DOOR WIDTH IS:1100mm+ 1100mm+50mm = 2250mm

2. THE DOOR HEIGHT (WHITHOUT ADJUSTABLE INSERT) COMES IN THE FOLOWING SIZE: 1960mm(STANDARD),2000mm,2100mm,2200mm,2250mm. THIS SIZE CAN BE INCREASED FROM 20mm TO 70mm WITH THE ADJUSTABLE BOTTON INSERT.

WALL OPENING - EMBRACING FRAME

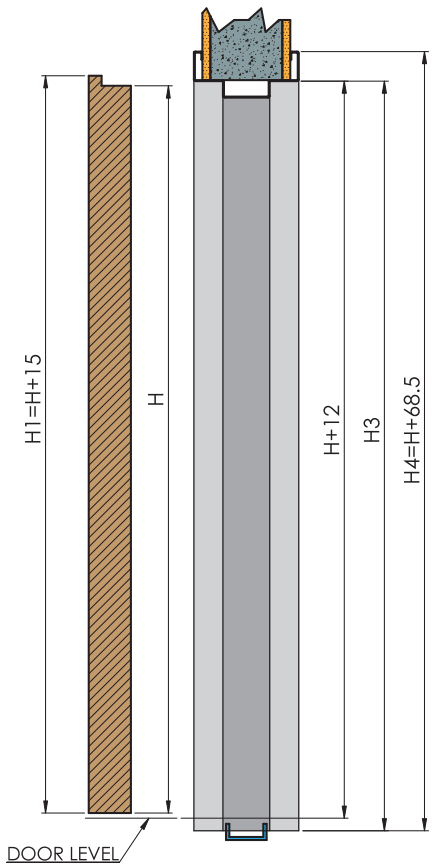



RIGHT HAND DOOR LEFT HAND DOOR

WRAP FRAME PROFILE

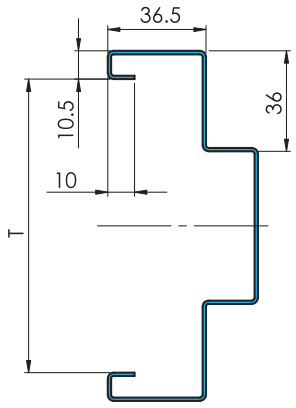

HORIZONTAL SECTION VIEW

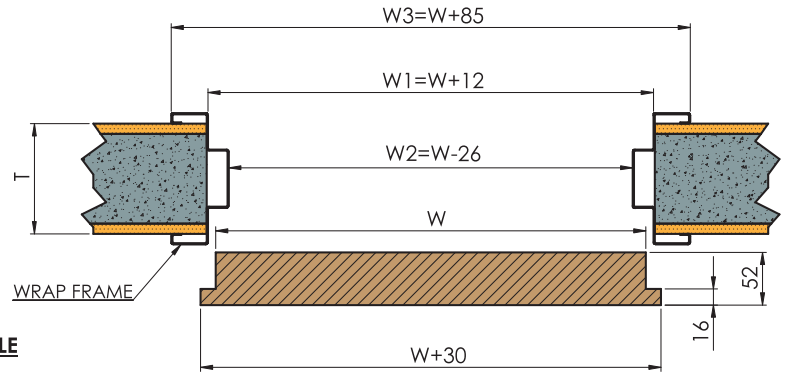

DIMMENSION	DEFINITION	STANDARD SIZE	SIZE RANGE	NOTES
W	SINGLE DOOR WIDTH	780 - 880	300 - 1140	1
H	DOOR HEIGHT INCLUDING ADJUSTABLE INSERT	1900-2040	MAX 2300	2
T	WALL WIDTH	100; 110	90 - 240	3

NOTES:

1. SINGLE DOOR WIDTH INCREASES BY 20 mm, i.e. 300,320,340 ITC.
   FOR A DOUBLE LEAF THE OVERALL WIDTHS IS: W=Wa+Wb+50mm
   Wa - FIRST DOOR WIDTH, Wb - SECOND DOOR WIDTH
   50mm - MULLION WIDTH i.e. MAXIMUM DOUBLE LEAF DOOR WIDTH IS:1100mm+ 1100mm+50mm = 2250mm

2. THE DOOR HEIGHT (WHITHOUT ADJUSTABLE INSERT) COMES IN THE FOLOWING SIZE: 1960mm(STANDARD),2000mm,2100mm,2200mm,2250mm. THIS SIZE CAN BE INCREASED FROM 20mm TO 70mm WITH THE ADJUSTABLE BOTTON INSERT.